


MIKALINE

The toolset consists of a range of profiles with sandblasted optics for general lighting or shielded LED dots with a low UGR for task lighting, several connectors to couple up to 4 profiles together, a handful of fixations to joint the profiles with wall or ceiling and a series of plug-in cables for an easy electrical supply of the system.

With up to 10m of profile from 1 feeding point, the 48V powered Mikaline is perfect to build structures for spacious environments and at the same time easily fits in smaller scaled rooms. Create frameworks that light up the room completely, opt for a cosy setting with only indirect light towards the wall or go for a pure linear pattern with dedicated task lighting, possibilities are endless and customizable to individual preferences.

Mikaline is not only appealing as a structure, also the design of the toolset itself is pure eye candy. The dark black structured lines are in powerful contrast with the shiny chromed connection sets. The playful shape of the cable connectors add a joyful element into the linear patterns and the options of Gold Coloured as a finish add a luxurious touch and feel to it. Like brush strokes on a black canvas.

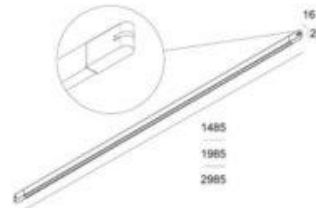

GENERAL LIGHT


NEW
MIKALINE

		L148	L198	L298
3000K CRI>90	LED 20W / 1568lm / 48V-DC	30611 9300 ◊		
	LED 27W / 2138lm / 48V-DC		30612 9300 ◊	
	LED 41W / 3278lm / 48V-DC			30613 9300 ◊
2700K CRI>90	LED 20W / 1485lm / 48V-DC	30611 9200 ◊		
	LED 27W / 2025lm / 48V-DC		30612 9200 ◊	
	LED 41W / 3105lm / 48V-DC			30613 9200 ◊

◊ B ● / GC ●
INCL.1 x PLUG-IN 48V CABLE 11cm



TASK LIGHT

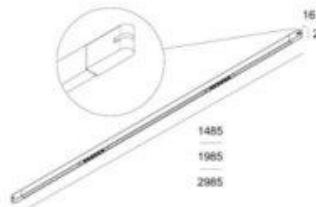


NEW
MIKALINE-OH! MDL

		L148	L198	L298
3000K CRI>90	2 x LED 5,2W / 596lm / 48V-DC	30614 9320 ◊		
	3 x LED 5,2W / 596lm / 48V-DC		30615 9320 ◊	
	4 x LED 5,2W / 596lm / 48V-DC			30616 9320 ◊
2700K CRI>90	2 x LED 5,2W / 581lm / 48V-DC	30614 9220 ◊		
	3 x LED 5,2W / 581lm / 48V-DC		30615 9220 ◊	
	4 x LED 5,2W / 581lm / 48V-DC			30616 9220 ◊


◊ B ● / GC ●
INCL.1 x PLUG-IN 48V CABLE 11cm



JUNCTION

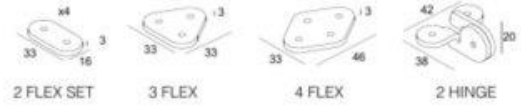


FIXATION

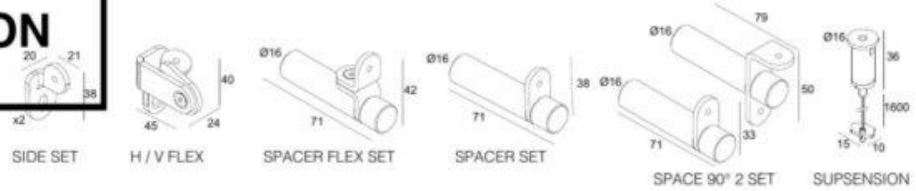

INTERIOR CEILING

CONNECTION

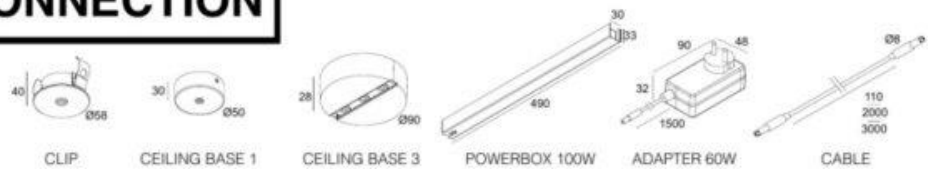

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY

			REQUIREMENT / OPTION / ACCESSORY					
			MIKALINE			MIKALINE-OH! MDL		
			L148	L198	L298	L148	L198	L298
LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT								
NON DIM - 48V-DC - 240W	300 89 46 240	114 x 63 x 125	R*	R*	R*	R*	R*	R*
1-10V DIM - 48V-DC - 90W	21032 0331	171 x 63 x 38	R*	R*	R*			
DALI DIM - 48V-DC - 90W	21032 0345	171 x 63 x 38	R*	R*	R*			
or POWERBOX								
or POWERBOX 100W	NON DIM	30610 0170 B	R	R	R	R	R	R
or POWER ADAPTER 60W	NON DIM	30610 0190 B	R	R	R	R	R	R
MODULATOR MORE INFO TECHNICAL CHAPTER								
MODULATOR DALI 1-10V DIM	300 90 011	93 x 78 x 56				R*	R*	R*
or MODULATOR WIRELESS	300 90 012	93 x 78 x 56				R*	R*	R*
JUNCTION								
2 FLEX SET	30610 0010 C	4 PCS.	O	O	O	O	O	O
3 FLEX	30610 0020 C	1 PC.	O	O	O	O	O	O
4 FLEX	30610 0030 C	1 PC.	O	O	O	O	O	O
2 HINGE	30610 0040 C	1 PC.	O	O	O	O	O	O
FIXATION								
SIDE SET	30610 0050 C	2 PCS.	R	R	R	R	R	R
or SPACER FLEX SET	30610 0060 B	2 PCS.	R	R	R	R	R	R
or H / V FLEX	30610 0070 C	1 PC.	R	R	R	R	R	R
or SPACER SET	30610 0090 B	2 PCS.	R	R	R	R	R	R
or SPACER 90° 2 SET	30610 0180 B	2 PCS.	R	R	R	R	R	R
or SUSPENSION	30610 0080 B	1 PC.	R	R	R	R	R	R
CONNECTION								
CONNECTION CLIP	30610 0140 B	Ø51 x 40	R**	R**	R**	R**	R**	R**
or CONNECTION CEILING BASE 1	30610 0160 B		R**	R**	R**	R**	R**	R**
or CONNECTION CEILING BASE 3	30610 0150 B		R**	R**	R**	R**	R**	R**
PLUG-IN 48V CABLE 1.1CM	30610 0100	max. 120W (3A)	R	R	R	R	R	R
or PLUG-IN 48V CABLE 1.5M	30610 0110	max. 120W (3A)	R	R	R	R	R	R
or PLUG-IN 48V CABLE 3M	30610 0120	max. 120W (3A)	R	R	R	R	R	R

* REMOTE INSTALLATION
** REQUIRED IN COMBINATION WITH POWER SUPPLY

B