

SOLISCAPE


The intention of Soliscape is to create flexible lightscares that are responsive to the user's ever-changing needs and activities, where design is no longer imposed by the designers, but guided by the user, resulting in responsive and adaptive design. The Soliscape system combines miniaturisation and personalisation, in a unique design language.

deltalight.com/soliscape



SOLI-SENSE

The Soli-Sense module is key in the user-centric approach of Soliscape, as it captures relevant data from its surroundings that serve to interact with the modules of the system or – by extension – with the complete Building Management System. Detecting presence, adapting the light intensity based on incoming daylight, adjusting the HVAC system according to the temperature, humidity and air quality in the room to obtain an optimal user environment are some examples. By integrating all modules in our Smart Q environment, Soliscape becomes the basis that interacts with all smart systems in its surroundings.

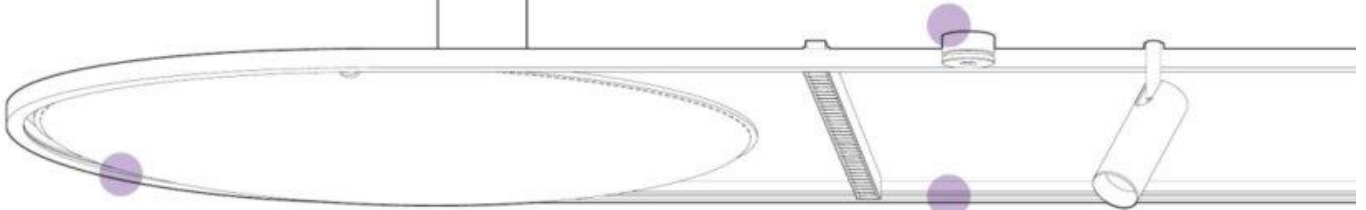

SOLI-SHHH

For additional optimization of room acoustics, Soliscape enables you to combine user focused lighting with Soli-Shhh panels. The sound-absorbing panels can easily be added or removed, positioned flat or tilted, guaranteeing noise reduction to office spaces and meetings rooms in the most aesthetical way.

These sound-absorbing panels are created to solve the problem of indoor reverberation to guarantee the best acoustic comfort and wellbeing.

Absorbing the noises in the field of typical speech frequencies (between 500 Hz and 2000 Hz)

These sound absorbing panels can be applied to facilitate for specific functionalities, from acoustic to decorative and illuminous atmospheric scenes.

Soli-Shhh panels can be used as an add-on to the Soliscape toolbox or as a separate sound absorbing element, be it with or without additional spot modules mounted around the circle.




PROFILE

The slender Soliscape profile is the structural base to customize your Soliscape configurations. With dimensions reduced to 19mm x 23mm, it is minimalism at its purest, allowing you to create unique "graphical" configurations. In contrast to common track or profile suspensions, all modules are plugged in from above, maintaining a smooth appearance from below.

The linear elements can be combined with the signature Soliscape curved or 90° corners, upgrading its surroundings with dynamism and attitude.



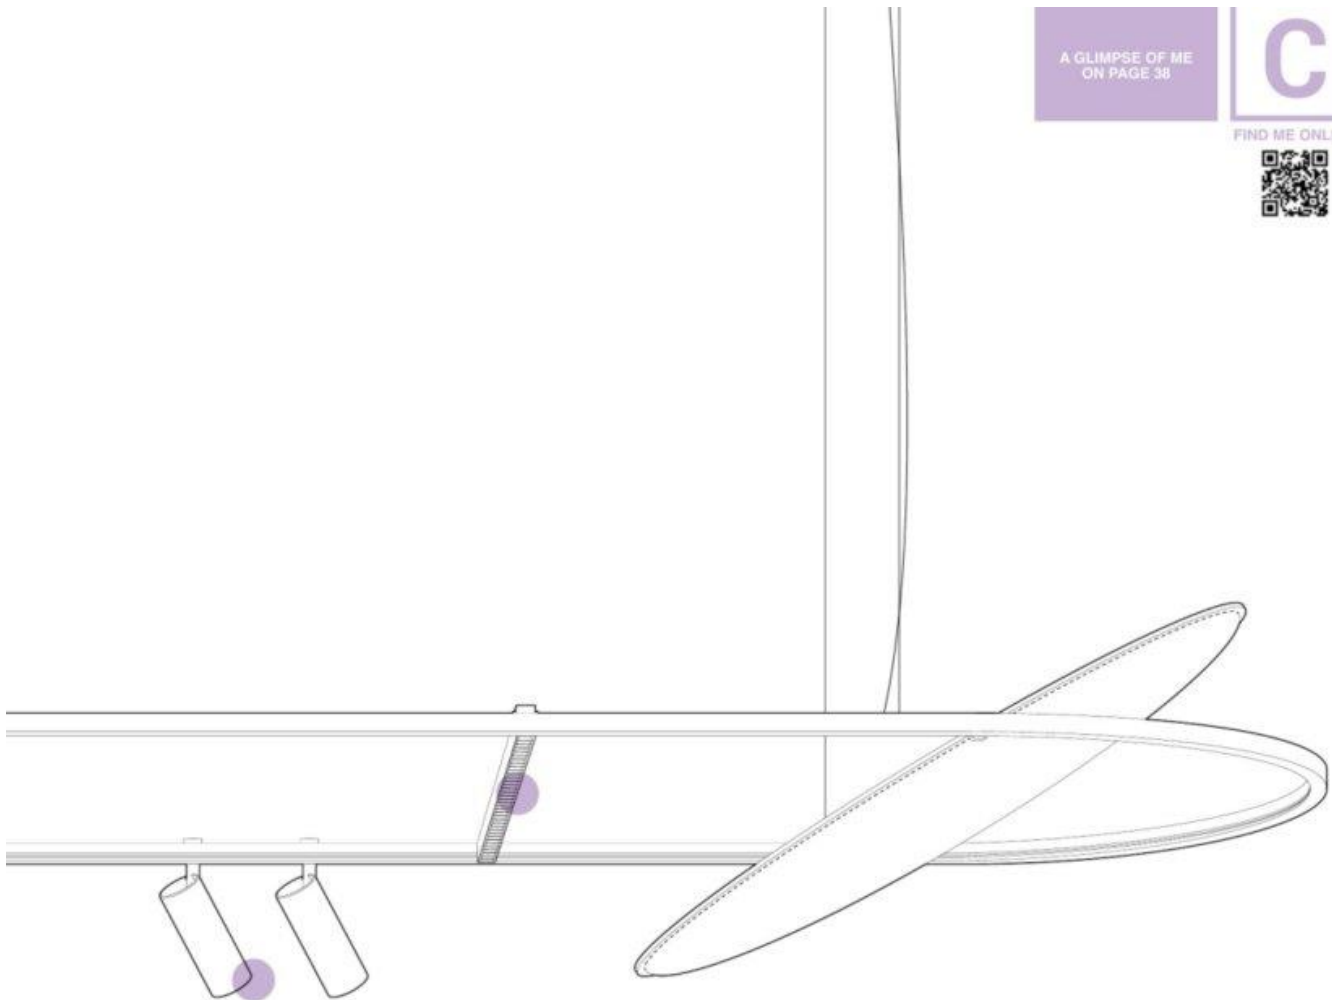

INTERIOR CEILING

SOLI-52 / SOLI-66

The Soliscape spot modules enable you to illuminate any part of the room where Soliscape is applied. The hybrid optics guarantee a precise beam, as the lens controls and shapes the light that is reflected from the high-quality reflector. The spot modules have a colour rendering of CRI ≥ 90 , or come in a CRI ≥ 95 version with Delta Light's unique Natural Light Technology (NLT), state of the art LEDs with a spectrum that very closely matches that of the sun. That includes a broader spectrum, which is preferable for the human eye and brings out the vibrant colours, and an enhanced cyan energy, boosting the human activity. As so, helping to control the circadian rhythm to further stimulate the human well-being.

The Soliscape spot modules makes its connection on the top of the profile, keeping a very clean and refined appearance without compromising on flexibility and performance.



SOLI-FORM

The core strength of the Soli-Form is a combination of Delta Light's Melanopic Light Technology (MLT) with high efficient louvre optics. The reflector is designed to perfectly embrace every individual LED module in a way to boost the efficiency of the complete luminaire, while maintaining a high level of visual comfort, as every LED dot is shielded from being looked into.

The Soli-Form profile breaths refinement in all its aspects. Its slender dimensions of 28 by 28mm weld in seamlessly with the slim dimensions of the Soliscape. The human aspect is the central topic for Soli-Form. It offers LEDs that help control the circadian rhythm via a unique spectrum meant to stimulate activity. The high quality LEDs provide a very natural white colour with a higher amount of energy in the cyan region, helping you to be active during the day and encourage sleep at night.

Despite its minimalistic design, Soli-Form does not compromise on performance. With a delivered lumen package downwards of up to 3045lm per meter, Soli-Form is perfect for illuminating task areas like office desks or reception counters. Within the same dimensions one can also opt for a down-up version, enhancing the sense of space and creating a uniform glow on both vertical as horizontal surfaces, which leads to a reduced contrast and relaxes the eye.

The Soli-Form profiles can be positioned alongside the structure or across, connecting both sides.




SOLI-LINE

Apart from task lighting and focused accent lighting, Soliscape offers linear solutions for general lighting as well. In line with the complete set-up, the design is minimalist and straightforward. Installed in line with the profile or connecting two opposite profiles, these straight lines are finished with a sandblasted optic to diffuse the light around the room, both as down- or upright.



SOLISCAPE



SOLISCAPE

1 PROFILE

| | |
|---|-----------------------------|
| PROFILE 2m | 27111 0020 ◊ ◊ B ● / W ○ |
| PROFILE 3m | 27111 0030 ◊ ◊ B ● / W ○ |
| 48V-DC (2 CONDUCTORS) - 2 CONDUCTORS FOR INDIVIDUAL DIMMING/DATA (●) IP20 | |

2 DIMENSIONS

The length of each profile needs to be defined in mm and will depend on the shape and construction of the design and the light modules selected to go in to each profile section.

3 JUNCTION / CORNER

| | |
|--------------------|------------------|
| CORNER 180° | 27111 0620 B / W |
| CORNER 180° MIRROR | 27111 0630 B / W |
| CORNER SET 90° | 27111 0640 B / W |
| CORNER SET 90° OUT | 27111 0650 B / W |
| CORNER SET R 60 | 27111 0720 B / W |
| CORNER SET R 90° | 27111 0730 B / W |

4 ENDCAP

| | |
|---------------------|------------------|
| ENDCAP SET (2 PCS.) | 27111 0410 B / W |
|---------------------|------------------|

5 FIXATION

| | |
|------------------------------|------------------|
| SUSPENDED | |
| SUSPENSION SINGLE 3M (1 PC.) | 27111 0530 B / W |
| SUSPENSION ST | 15225 0340 B / W |

6 CONNECTION

| | |
|---|------------------|
| POWERBOX | |
| NON DIM 48V-DC / 200W - R | 27110 0090 B / W |
| NON DIM 48V-DC / 200W - L | 27110 0100 B / W |
| SUPPLY 48V-DC (max.200W/supply/max.50m) Incl. cable 3,5m - 2x 1,5mm ² + 2x 0,34mm ² BLACK for B, GREY for W | 27111 9960 B / W |
| CONNECTION ST | 15225 0360 B / W |
| CONNECTOR 48V-DC - 180° (max.200W/supply/max.50m) | 27011 9910 |
| CONNECTOR 48V-DC - 90° (max.200W/supply/max.50m) | 27011 9920 |
| CONNECTOR 48V-DC - R 60 (max.200W, incl. cable) | 27111 9940 |
| CONNECTOR 48V-DC - R 90 (max.200W, incl. cable) | 27111 9950 |

7 ACOUSTIC PANEL







| | |
|----------------|------------------|
| SOLI-SH-HH 60- | |
| LIGHT GREY | 27110 0010 B / W |
| DARK GREY | 27110 0020 B / W |
| SCARLET | 27110 0110 B / W |
| SAND | 27110 0120 B / W |
| LILAC | 27110 0130 B / W |
| ARCTIC | 27110 0140 B / W |
| SOLI-SH-HH 90- | |
| LIGHT GREY | 27110 0030 B / W |
| DARK GREY | 27110 0040 B / W |
| SCARLET | 27110 0150 B / W |
| SAND | 27110 0160 B / W |
| LILAC | 27110 0170 B / W |
| ARCTIC | 27110 0180 B / W |

MODULES

SEE NEXT PAGES




TOOLBOX

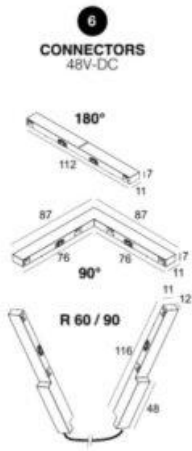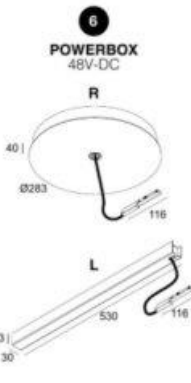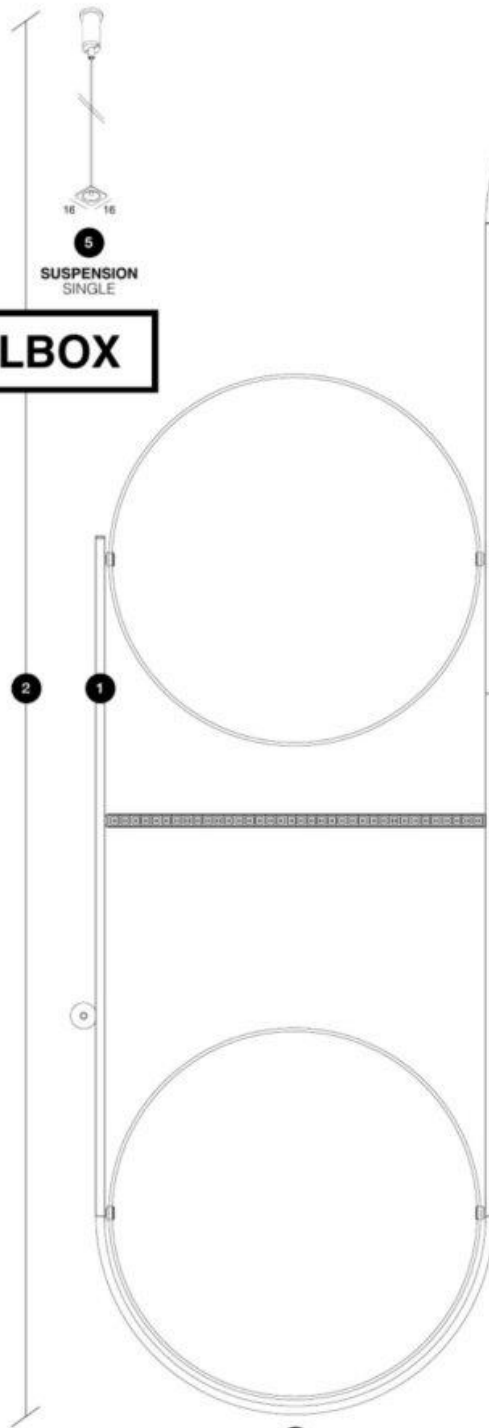

INTERIOR CEILING

SOLISCAPE

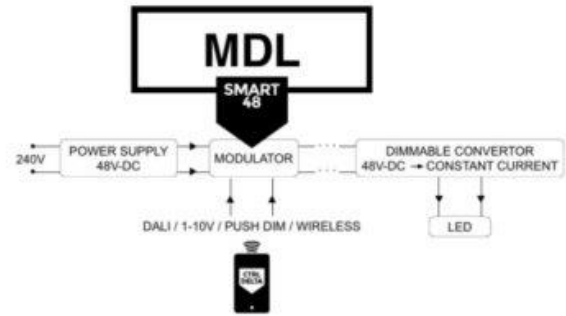

NLT - NATURAL LIGHT TECHNOLOGY

Soli 52 / 66 make use of Delta Light's Natural Light Technology (NLT), state of the art LEDs with a spectrum that very closely matches that of the sun. That includes a broader spectrum, which is preferable for the human eye and brings out the vibrant colours, and an enhanced cyan energy, boosting the human activity.



A

SOLI

| | | 52 | | | 66 | | |
|---------------------|---|------------------|--------------|--------------|--------------|--------------|--------------|
| | | MDL | DALI DIM | Q DIM | MDL | DALI DIM | Q DIM |
| 3000K CRI>90 | LED 10.3W / 1281lm / 48V-DC | 20° 27112 9320 ◊ | 27115 9325 ◊ | 27118 932Q ◊ | | | |
| | LED 20.5W / 2499lm / 48V-DC | 45° 27112 9330 ◊ | 27115 9335 ◊ | 27118 933Q ◊ | | | |
| 3000K CRI>98 | NLT LED 10.7W / 1040lm / 48V-DC | 18° | | | 27121 9310 ◊ | 27123 9315 ◊ | 27125 931Q ◊ |
| | NLT LED 21.1W / 2068lm / 48V-DC | 30° | | | 27121 9320 ◊ | 27123 9325 ◊ | 27125 932Q ◊ |
| 3000K CRI>95 | NLT LED 10.3W / 1224lm / 48V-DC | 45° | | | 27121 9330 ◊ | 27123 9335 ◊ | 27125 933Q ◊ |
| | NLT LED 20.5W / 2432lm / 48V-DC | 18° | | | 27122 7310 ◊ | 27124 7315 ◊ | 27126 731Q ◊ |
| 2700K CRI>90 | NLT LED 10.7W / 967lm / 48V-DC | 30° | | | 27122 7320 ◊ | 27124 7325 ◊ | 27126 732Q ◊ |
| | NLT LED 21.1W / 1925lm / 48V-DC | 45° | | | 27122 7330 ◊ | 27124 7335 ◊ | 27126 733Q ◊ |
| 2700K CRI>98 | NLT LED 10.3W / 1224lm / 48V-DC | 20° | 27112 9220 ◊ | 27115 9225 ◊ | 27118 922Q ◊ | | |
| | NLT LED 20.5W / 2432lm / 48V-DC | 45° | 27112 9230 ◊ | 27115 9235 ◊ | 27118 923Q ◊ | | |
| 2700K CRI>95 | NLT LED 10.7W / 967lm / 48V-DC | 18° | | | 27121 9210 ◊ | 27123 9215 ◊ | 27125 921Q ◊ |
| | NLT LED 21.1W / 1925lm / 48V-DC | 30° | | | 27121 9220 ◊ | 27123 9225 ◊ | 27125 922Q ◊ |
| 3000-1800K / CRI>90 | NLT LED 10.2W / 1038lm / 48V-DC | 45° | | | 27121 9230 ◊ | 27123 9235 ◊ | 27125 923Q ◊ |
| | NLT LED 20.4W / 2076lm / 48V-DC | 20° | 27113 7220 ◊ | 27116 7225 ◊ | 27119 722Q ◊ | | |
| 3000-1800K / CRI>90 | NLT LED 10.2W / 1038lm / 48V-DC | 45° | 27113 7230 ◊ | 27116 7235 ◊ | 27119 723Q ◊ | | |
| | NLT LED 20.4W / 2076lm / 48V-DC | 18° | | | 27122 7210 ◊ | 27124 7215 ◊ | 27126 721Q ◊ |
| 3000-1800K / CRI>90 | NLT LED 10.2W / 1038lm / 48V-DC | 30° | | | 27122 7220 ◊ | 27124 7225 ◊ | 27126 722Q ◊ |
| | NLT LED 20.4W / 2076lm / 48V-DC | 45° | | | 27122 7230 ◊ | 27124 7235 ◊ | 27126 723Q ◊ |
| 3000-1800K / CRI>90 | NLT LED 10.2W / 1038lm / 48V-DC | 20° | 27184 9020 ◊ | 27185 9025 ◊ | 27186 902Q ◊ | | |
| | NLT LED 20.4W / 2076lm / 48V-DC | 45° | 27184 9030 ◊ | 27185 9035 ◊ | 27186 903Q ◊ | | |

NLT - NATURAL LIGHT TECHNOLOGY

◊ B ● / GC ● / W ◊

◊ B ● / W ◊



MLT - MELANOPIC LIGHT TECHNOLOGY

The high quality LEDs provide a very natural white colour with a higher amount of energy in the cyan region, helping you to be active during the day and encourage sleep at night.

A GLIMPSE OF ME
ON PAGE 38




FIND ME ONLINE




SOLI-FORM

| UGR <19 | DOWN | | | DOWN-UP | | | |
|------------------------|--|------------|--------------|--------------|--------------|--------------|--------------|
| | MDL | DALI DIM | Q DIM | MDL | DALI DIM | Q DIM | |
| | | | | | | | |
| LED 3000K CRI>80 | 10,1W / 1651lm / 48V-DC | L564 | 27127 8320 ◊ | 27130 8325 ◊ | 27133 832Q ◊ | | |
| | 15,2W / 2477lm / 48V-DC | L840 | 27128 8320 ◊ | 27131 8325 ◊ | 27134 832Q ◊ | | |
| | 20,3W / 3302lm / 48V-DC | L1104 | 27129 8320 ◊ | 27132 8325 ◊ | 27135 832Q ◊ | | |
| | UP 6,6W / 1126lm / 48V-DC | L564 | | | 27136 8320 ◊ | 27139 8325 ◊ | 27144 832Q ◊ |
| | DOWN 6,6W / 1126lm / 48V-DC | 2 circuits | | | | 27140 8325 ◊ | 27145 832Q ◊ |
| | UP 9,8W / 1688lm / 48V-DC | L840 | | | 27137 8320 ◊ | 27141 8325 ◊ | 27146 832Q ◊ |
| | DOWN 9,8W / 1688lm / 48V-DC | 2 circuits | | | | 27142 8325 ◊ | 27147 832Q ◊ |
| | UP 13,1W / 2251lm / 48V-DC | L1104 | | | 27138 8320 ◊ | | |
| | DOWN 13,1W / 2251lm / 48V-DC | 2 circuits | | | | 27143 8325 ◊ | 27148 832Q ◊ |
| | ◊ B-B ●●● / B-MMAT ●●● / W-W ○○○ / W-B ○●● | | | | | | |

POSITION FOR SOLI-FORM/LINE



LIGHTSCAPES



SOLI-LINE

| IP20 | DOWN | | | UP | | | | |
|------------------------|-------------------------|----------|--------------|--------------|--------------|--------------|--------------|--------------|
| | MDL | DALI DIM | Q DIM | MDL | DALI DIM | Q DIM | | |
| | | | | | | | | |
| LED 3000K CRI>90 | 11,7W / 1500lm / 48V-DC | L564 | 27149 9300 ◊ | 27152 9305 ◊ | 27155 930Q ◊ | 27158 9300 ◊ | 27161 9305 ◊ | 27164 930Q ◊ |
| | 18W / 2240lm / 48V-DC | L840 | 27150 9300 ◊ | 27153 9305 ◊ | 27156 930Q ◊ | 27159 9300 ◊ | 27162 9305 ◊ | 27165 930Q ◊ |
| | 23,4W / 3000lm / 48V-DC | L1128 | 27151 9300 ◊ | 27154 9305 ◊ | 27157 930Q ◊ | 27160 9300 ◊ | 27163 9305 ◊ | 27166 930Q ◊ |
| | ◊ B ●●● / W ○○○ | | | | | | | |

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY


| | SOLI 52 | SOLI 66 | | | SOLI-FORM | | | SOLI-LINE | | |
|---|----------------------------------|---------|------|---|-----------|------|---|-----------|------|---|
| | | MDL | DALI | Q | MDL | DALI | Q | MDL | DALI | Q |
| LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT | | | | | | | | | | |
| NON DIM - 48V-DC - 240W | 300 89 48 240 | | | | | | | | | |
| or POWERBOX | | | | | | | | | | |
| NON DIM - 48V-DC - 200W | 27110 0090 | | | | | | | | | |
| NON DIM - 48V-DC - 200W | 27110 0100 | | | | | | | | | |
| MODULATOR MORE INFO TECHNICAL CHAPTER | | | | | | | | | | |
| MODULATOR DALI 1-10V DIM | 300 90 011 | | | | | | | | | |
| or MODULATOR WIRELESS | 300 90 012 | | | | | | | | | |
| CONTROL MORE INFO TECHNICAL CHAPTER | | | | | | | | | | |
| Q CONTROL | 21032 0150 | | | | | | | | | |
| Q GATEWAY | 21032 0160 | | | | | | | | | |
| Q PUSH BUTTON INTERFACE | 21032 0170 | | | | | | | | | |
| FINISH | | | | | | | | | | |
| SPY 52 TUBE | 19810 0100 B / FBR / FG / GC / W | | | | | | | | | |
| SPY 66 TUBE | 24611 0100 B / FBR / FG / GC / W | | | | | | | | | |
| HONEYCOMB / LENS / GLASS | | | | | | | | | | |
| HONEYCOMB SINGLE USE | 19810 0010 B | | | | | | | | | |
| HONEYCOMB DOUBLE USE | 19810 0060 B | | | | | | | | | |
| LINEAR SPREAD LENS | 19810 0020 | | | | | | | | | |
| SPREAD LENS | 19810 0030 | | | | | | | | | |
| SOFTENING LENS | 19810 0040 | | | | | | | | | |
| GLASS SBL | 19810 0050 | | | | | | | | | |
| HONEYCOMB SINGLE USE | 24611 0150 B | | | | | | | | | |
| HONEYCOMB DOUBLE USE | 24611 0210 B | | | | | | | | | |
| LINEAR SPREAD LENS | 24611 0170 | | | | | | | | | |
| SPREAD LENS | 24611 0200 | | | | | | | | | |
| SOFTENING LENS | 24611 0190 | | | | | | | | | |
| GLASS SBL | 24611 0160 | | | | | | | | | |

* REMOTE INSTALLATION

INTERIOR CEILING



SOLISCAPE



| SOLI-SHHH C | | 600 | 900 | 1200 |
|-------------|------------|--------------|--------------|--------------|
| | LIGHT GREY | 27167 0000 ◊ | 27169 0000 ◊ | 27171 0000 ◊ |
| | DARK GREY | 27168 0000 ◊ | 27170 0000 ◊ | 27172 0000 ◊ |
| | SCARLET | 21401 0000 ◊ | 21405 0000 ◊ | 21409 0000 ◊ |
| | SAND | 21402 0000 ◊ | 21406 0000 ◊ | 21410 0000 ◊ |
| | LILAC | 21403 0000 ◊ | 21407 0000 ◊ | 21411 0000 ◊ |
| | ARCTIC | 21404 0000 ◊ | 21408 0000 ◊ | 21412 0000 ◊ |

◊ B ● / W ○
INCL. 3 x CABLE SUSP. SINGLE AUTO. 3m



| SOLI-SHHH PLUS | | 600 | 900 | 1200 | |
|----------------|------------|-------------------------|-------------------------|-------------------------|-------------------------|
| | | FOR 4 x SOLI 52-SHHH | FOR 4 x SOLI 52-SHHH | FOR 4 x SOLI 52-SHHH | FOR 8 x SOLI 52-SHHH |
| | | DALI DIM | DALI DIM | DALI DIM | DALI DIM |
| | LIGHT GREY | 27173 0005 ◊ | 27175 0005 ◊ | 27177 0005 ◊ | 27179 0005 ◊ |
| | DARK GREY | 27174 0005 ◊ | 27176 0005 ◊ | 27178 0005 ◊ | 27180 0005 ◊ |
| | SCARLET | 21413 0005 ◊ | 21417 0005 ◊ | 21421 0005 ◊ | 21425 0005 ◊ |
| | SAND | 21414 0005 ◊ | 21418 0005 ◊ | 21422 0005 ◊ | 21426 0005 ◊ |
| | LILAC | 21415 0005 ◊ | 21419 0005 ◊ | 21423 0005 ◊ | 21427 0005 ◊ |
| | ARCTIC | 21416 0005 ◊ | 21420 0005 ◊ | 21424 0005 ◊ | 21428 0005 ◊ |

◊ B ● / W ○
INCL. POWER SUPPLY 110-240V / 50-60Hz
INCL. 3 x CABLE SUSP. SINGLE AUTO. 3m
INCL. 1 x CABLE 4 x 0,75mm²

NLT - NATURAL LIGHT TECHNOLOGY



| SOLI | | 52-SHHH | | |
|-----------------|---|----------------------------|--------------|--------------|
| | | MDL | | |
| 3000K CRI>90 | LED 10.3W / 1281lm / 600mA | 20° | 27181 9320 ◊ | |
| | | 45° | 27181 9330 ◊ | |
| | NLT LED 10.7W / 1040lm / 600mA | 20° | 27182 7320 ◊ | |
| | | 45° | 27182 7330 ◊ | |
| | 2700K CRI>90 | LED 10.3W / 1224lm / 600mA | 20° | 27181 9220 ◊ |
| | | | 45° | 27181 9230 ◊ |
| 2700K CRI>98 | NLT LED 10.7W / 967lm / 600mA | 20° | 27182 7220 ◊ | |
| | | 45° | 27182 7230 ◊ | |
| SOFT DIM | 3000-1800K / CRI>90 LED 10.2W / 1038lm / 500mA | 20° | 27187 9020 ◊ | |
| | | 45° | 27187 9030 ◊ | |

◊ B ● / GC ● / W ○

detailight.com/soliscap


A GLIMPSE OF ME
ON PAGE 38

C


FIND ME ONLINE



SOLI-SHHH VS SOLI-SHHH PLUS

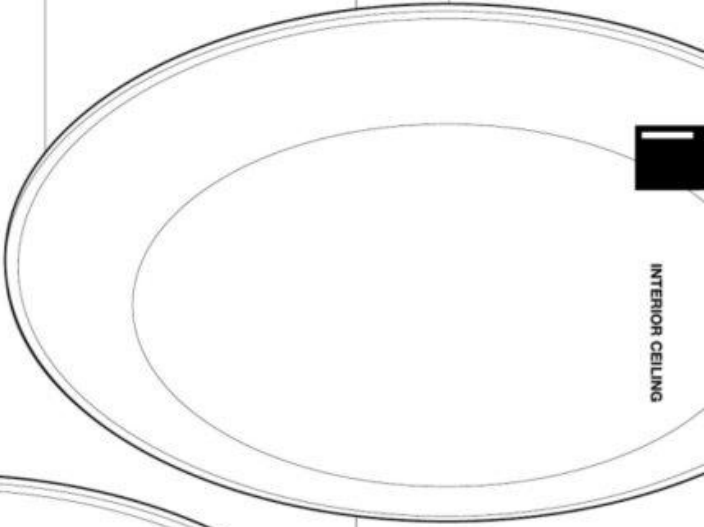

INTERIOR CEILING

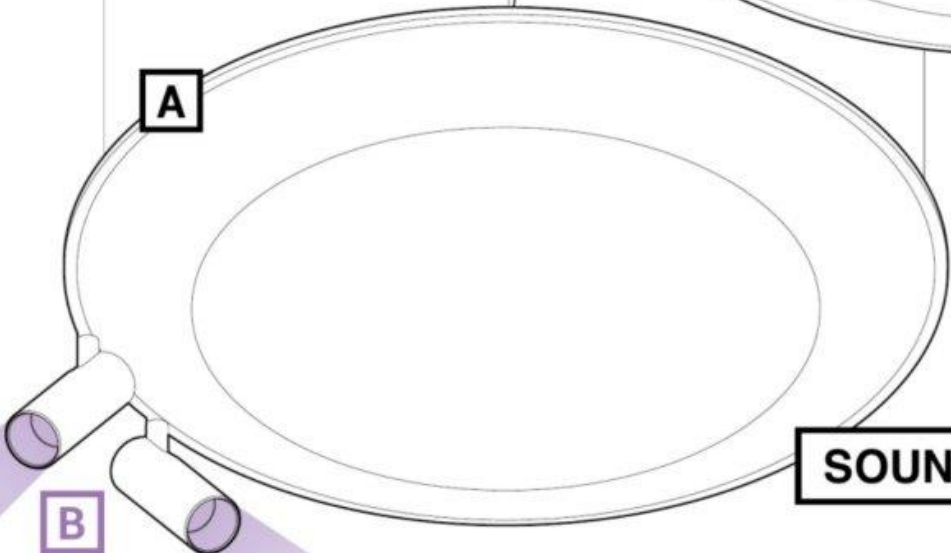

SOUNDSCAPES

FINISH YOUR SPECIFICATION

REQUIREMENT / OPTION / ACCESSORY



| | | SOLI-SHHH C | SOLI-SHHH PLUS | SOLI 52-SHHH |
|---------------------------------|------------------------|----------------------------------|----------------|--------------|
| FINISH | | | | |
| | SPY 52 TUBE | 19810 0100 B / FBR / FG / GC / W | | R |
| HONEYCOMB / LENS / GLASS | | | | |
| | HONEYCOMB SINGLE USE | 19810 0010 B | | A |
| | HONEYCOMB DOUBLE USE | 19810 0060 B | | A |
| | LINEAR SPREAD LENS | 19810 0020 | | A |
| | SPREAD LENS | 19810 0030 | | A |
| | SOFTENING LENS | 19810 0040 | | A |
| | GLASS SBL | 19810 0050 | | A |
| INSTALLATION | | | | |
| | SOLI-SHHH PLUS 600 | for max. 4x SOLI 52-SHHH | | R |
| | or SOLI-SHHH PLUS 900 | for max. 4x SOLI 52-SHHH | | R |
| | or SOLI-SHHH PLUS 1200 | for max. 4x SOLI 52-SHHH | | R |
| | or SOLI-SHHH PLUS 1200 | for max. 8x SOLI 52-SHHH | | R |
| | SUSPENSION ST | 15225 0340 B / W | O | |
| | CONNECTION ST | 15225 0360 B / W | O | |
| | CABLE BASE R | 203 99 55 ANO / B / W | O | |

SOLISCAPE

How to control SOLISCAPE



Sensorial responsive

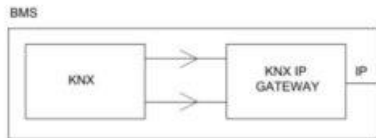


Hey Google,...

4 FUNCTIONS EXTERNAL PUSH BUTTON



Q-PUSH BUTTON INTERFACE

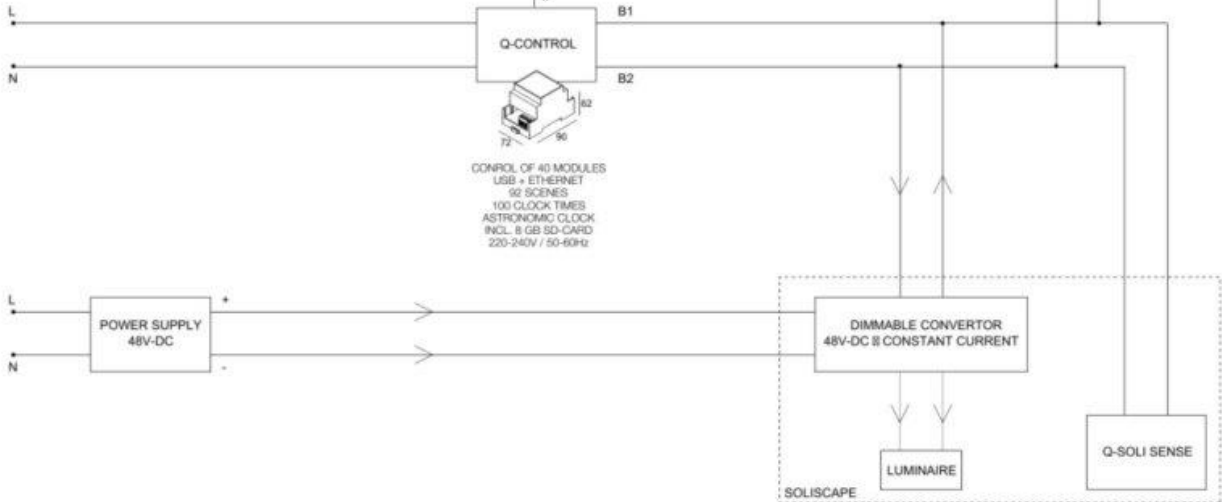

A GLIMPSE OF ME
ON PAGE 38



FIND ME ONLINE



INTERIOR CEILING

SOLISCAPE

VOICE CONTROL

| | |
|------------------------------------|----------------|
| SOLI-VOICE COMMAND GOOGLE HOLDER * | 21032 0220 B/W |
|------------------------------------|----------------|

SENSOR

| | |
|---------------------------------|--------------|
| DALI PRESENCE & DAYLIGHT SENSOR | 27110 0055 B |
| WIRELESS SENSOR HUB ** | 27110 0070 B |
| Q SENSOR HUB ** | 27110 0080 B |

Q CONTROL

| | |
|-------------------------|------------|
| Q CONTROL 40-1 | 21032 0150 |
| Q GATEWAY | 21032 0160 |
| Q PUSH BUTTON INTERFACE | 21032 0170 |

* FOR GOOGLE NEST 2ND GENERATION SPEAKER
** PRESENCE & DAYLIGHT / TEMPERATURE / HUMIDITY / AIR QUALITY



REQUIREMENT / OPTION / ACCESSORY

| | | VOICE COMMAND GOOGLE HOLDER | DALI PRESENCE & DAYLIGHT SENSOR | WIRELESS SENSOR HUB | Q SENSOR HUB |
|---|---------------|--------------------------------|------------------------------------|------------------------|-----------------|
| LED POWER SUPPLY 48V-DC MORE INFO AND ALL POWER SUPPLIES ON FOLD-OUT RIGHT | | | | | |
| NON DIM - 48V-DC - 240W | 300 89 48 240 | 114 x 63 x 125 | R* | R* | R* |
| CONTROL MORE INFO TECHNICAL CHAPTER | | | | | |
| WIRELESS MODULATOR | 300 90 012 | | | R* | |
| Q CONTROL | 21032 0150 | | R | | R |
| Q GATEWAY | 21032 0160 | | R | | R |

* REMOTE INSTALLATION